

Series: COMPACT-FAN Type CE

single inlet
with forward curved blades

FISCHBACH

Luft- und Ventilatorentechnik GmbH

Type: CE9-090/D2.5

ERP KONFORM

CE -conform




Forgalmazó:
Oxyma Systems Kft.
3433 Nyékládháza, Ady Endre u. 49/A

phone: +36 (30) 665-5982
internet: www.fischbach-air.hu
email: oxyma@oxyma.hu


Technical Data

weight:	(kg)	57,5
material housing:	steel, galvanized	
material impeller:	steel, galvanized	
direction of rotation:	left/right	
protection class:	IP 65	
insulation class:	F	
motor protection:	thermal contact	

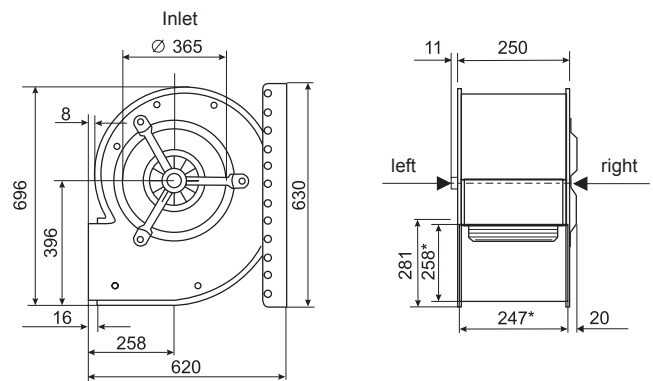


*external dimension of discharge

connection plan
0.13-2 r.

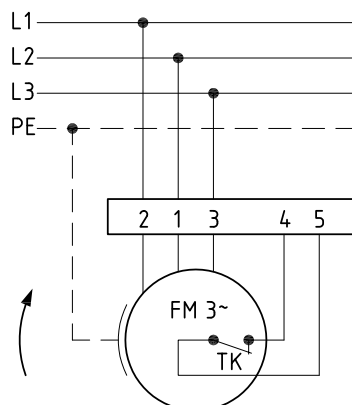


connection plan
0.13-2 l.

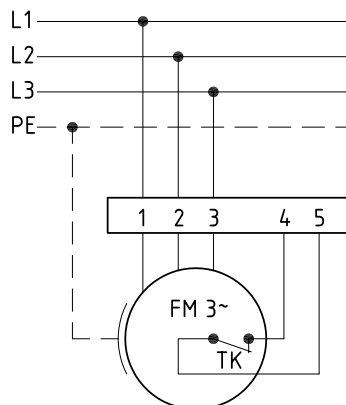

rotating right

rotating left

the silent one



Series: **COMPACT-FAN Type CE**

single inlet
with forward curved blades

FISCHBACH

Luft- und Ventilatorentechnik GmbH

Type: **CE9-090/D2.5**

Erp 2013 2015 x 2018


Performance data

main voltage:	(V)	400 (3~)
frequency:	(Hz)	50
current max.:	(A)	9,9
power input max.:	(kW)	4,7
air flow volume max.:	(m³/h)	7800
statical pressure max.:	(Pa)	1092
speed max.:	(rpm)	1443
supply air temperature:	(°C)	-25...+60
capacitor:	(µF)	-

ErP-Data:

total efficiency fan (η_e):	(%)	40,6
installation category:		A
efficiency category:		static
efficiency grade: N	(%)	44
target efficiency (η_{target}):	(%)	40,6
speed controller		no
year of manufacturing		since 2015
manufacturer:	Fischbach Luft- und Ventilatorentechnik GmbH D-57290 Neunkirchen / HRB 5804 Siegen	
order no.:	le/ri	18021112/18021412
power input:	(kW)	2,88
air flow volume:	(m³/h)	4380
statical pressure:	(Pa)	960
speed:	(rpm)	1362
specific ratio:		1

disassembling/recycling/disposal: see page decommission
installation/operation/maintenance: see operating and mounting instructions
measurement for determination of efficiency without additional items

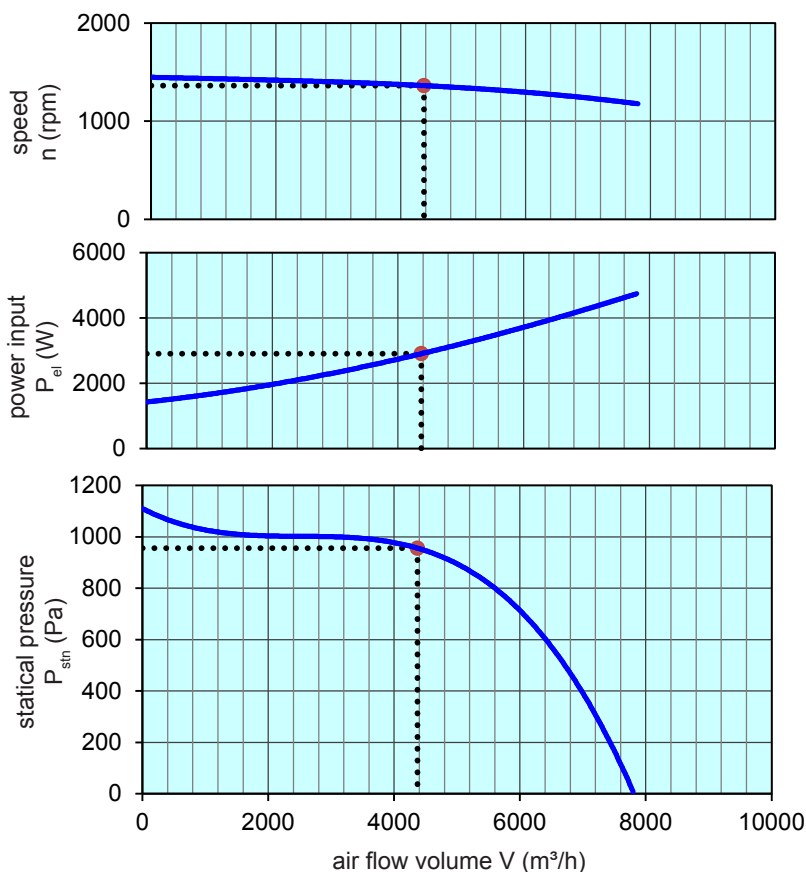

Speed controller / accessories / sound data, please see in the appropriate table

Technical documentation according to page: **General information**