

Series: EASY-BOX FEB
with Freewheeling impeller with
backward curved blades

FISCHBACH
Luft- und Ventilatorentechnik GmbH

Type: FEB500/D1

ERP KONFORM




CE -conform

Forgalmazó:
Oxyrna Systems Kft.
3433 Nyékládháza, Ady Endre u. 49/A


phone: +36 (30) 665-5982
internet: www.fischbach-air.hu
email: oxyrna@oxyrna.hu

Technical Data

weight:	(kg)	45
material housing:	aluminum/plastic steel, galvanized	
material impeller:	steel, galvanized	
direction of rotation:	left	
motor protection class:	IP 65	
insulation class:	F	
motor protection:	thermal contact	

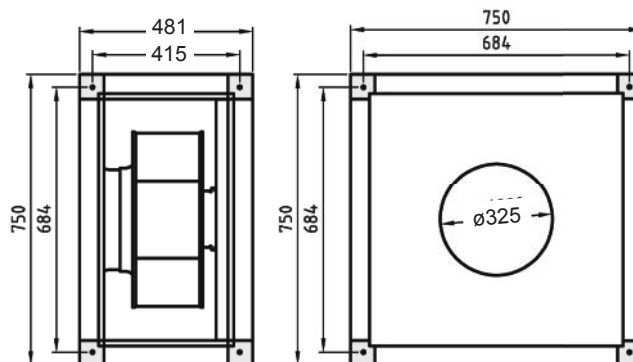

connection plan
0.13-2 I.

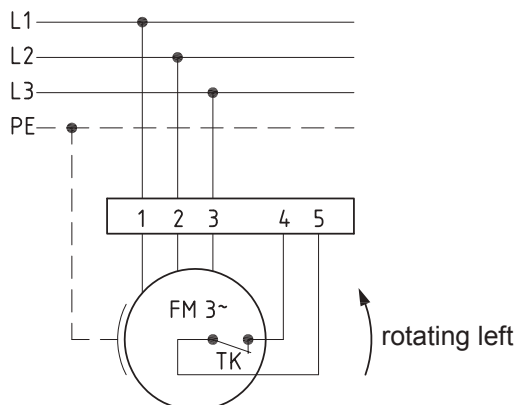

the silent one



Series: EASY-BOX FEB
with Freewheeling impeller with
backward curved blades

FISCHBACH
Luft- und Ventilatorentechnik GmbH

Type: FEB500/D1


ErP 2013 2015 2018 x

Performance data

main voltage:	(V)	400 (3~)
frequency:	(Hz)	50
current max.:	(A)	3,3
power input max.:	(kW)	1,4
air flow volume max.:	(m³/h)	8261
statical pressure max.:	(Pa)	740
speed max.:	(rpm)	1433
max. air flow temperature	(°C)	80
max. ambient temperature	(°C)	30
capacitor:	(µF)	-

ErP-Data:

total efficiency fan (η_e):	(%)	52,9
installation category:		A
efficiency category:		static
efficiency grade: N	(%)	62
target efficiency (η_{target}):	(%)	52,8
speed controller		no
year of manufacturing		since 2015
manufacturer:	Fischbach Luft- und Ventilatorentechnik GmbH D-57290 Neunkirchen / HRB. 5804 Siegen	
order no. (left)		18072650
power input:	(kW)	1,34
air flow volume:	(m³/h)	4350
statical pressure:	(Pa)	587
speed:	(rpm)	1352
specific ratio:		1
disassembling/recycling/disposal: see page decommission		
installation/operation/maintenance: see operating and mounting instructions		
measurement for determination of efficiency without additional items		

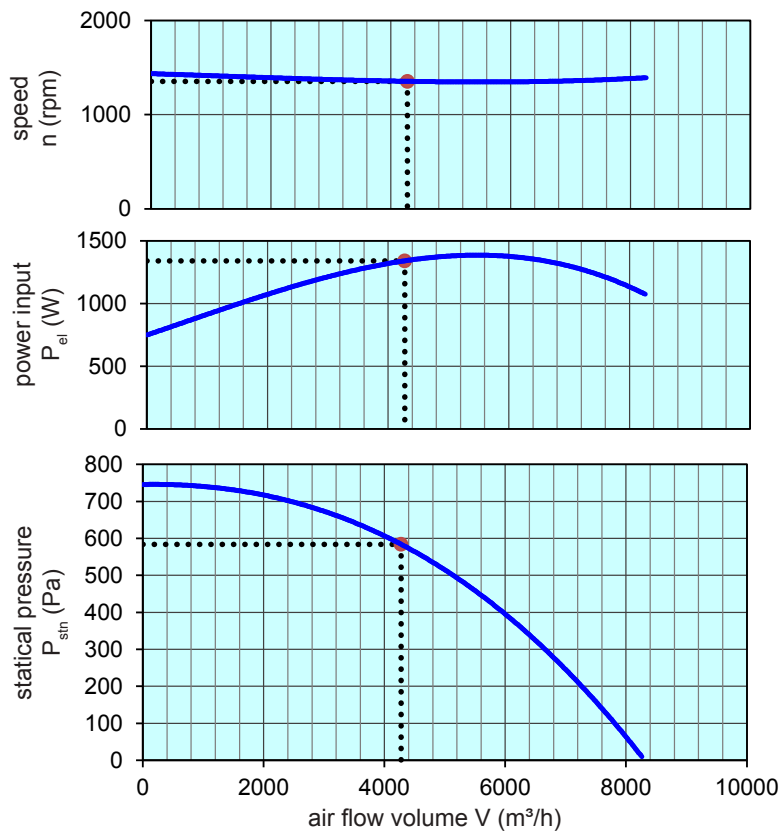

Voltage Control	type	order.-no.
FISCHBACH-Speed-Controller, stepless	FDR 55/3	6231
FISCHBACH-Speed-Controller, stepwise	FDR 5.5/3	6182
FISCHBACH-frequency-converter	FFU3-21-1.5	63740

Technical documentation according to page: **General information**